

xiaomi 67W Power Bank 20000 (Integrated Cable)
User Manual



Read this manual carefully before use, and retain it for future reference.


Product Overview

Thank you for choosing this product, which is a high-quality power bank supporting two-way fast charging. When this power bank is used to charge Xiaomi phones with a smart fast charging function, the power is up to 67 W. It uses the high-quality lithium-ion battery and the charging and discharging chip, and has outstanding performance in terms of safety, fast charging, and compatibility.

Safety: This power bank is designed based on multiple safeguarding technologies to prevent issues such as overcharging, over-discharging, overheating, and short circuits.

Fast charging: Fast charging and discharging, supporting USB-C input and output. The charging power is up to 65 W, and the discharging power is up to 67 W. The integrated USB-C cable/USB-C port supports 5 V/3 A, 9 V/3 A, 11 V/6.1 A, 12 V/3 A, 15 V/3 A, and 20 V/3.35 A fast charging modes. The USB-A port supports 5 V/3 A, 9 V/2.23 A, 10 V/2.25 A, and 12 V/1.67 A fast charging modes.


Compatibility: Built-in intelligent USB charging controller, compatible with mainstream mobile phones and digital devices.

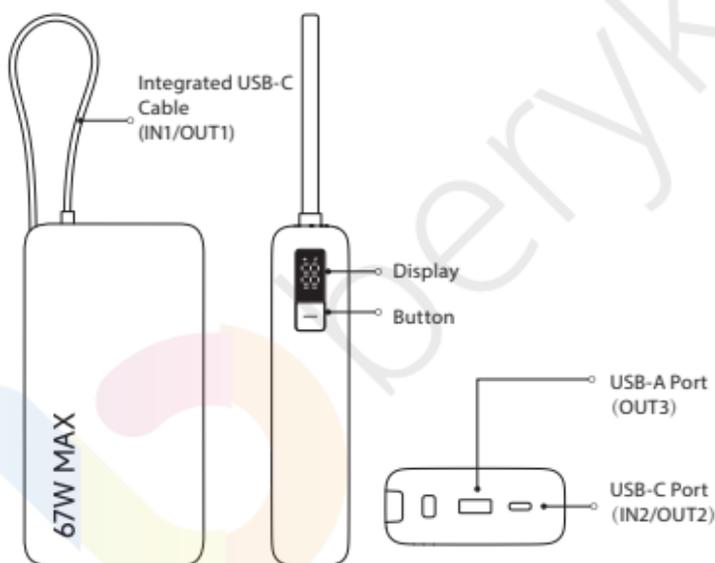

Note: The button is designed to turn on/off the display rather than the power bank. The power bank automatically detects charging and discharging without button operation.

Display Introduction

The power bank has rich display functions, including battery level, charging indicator, low-current indicator, and malfunction indicator.

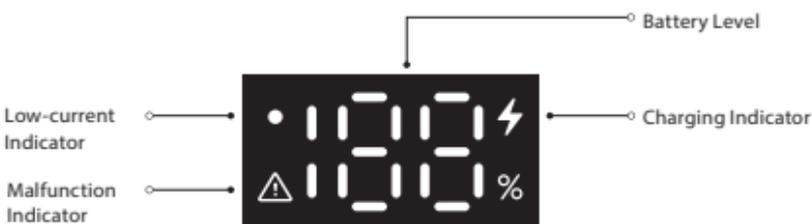

Charging/Discharging Interface

Battery level: Displays the current battery level of the power bank, ranging from 0% to 100%; the battery level blinks when the battery is below 10%.

Charging indicator: Displays when the power bank is being charged.

Low-current indicator: Displays when the power bank enters the low-current mode by pressing the button twice.

Malfunction indicator: Displays when the power bank has a malfunction.

Notes:

- The low-current mode is specially intended for charging low-current devices such as Bluetooth headphones, wristbands, and watches.
- After the power bank's USB-C port is connected to a low-current device, the power bank will automatically enter the low-current mode without manual operation. In this case, the power bank will not display the low-current indicator.
- If the USB-A port is needed to charge a low-current device, press the button twice. Then, the power bank will enter the low-current mode, and the display will show the low-current indicator. The power bank automatically exits this mode 2 hours later. The power bank can also exit this mode by pressing the button twice or connecting to a non-low-current device. If this mode is not needed, exit in time to avoid power consumption.

Button Instructions

| Status of Display | Button Operation | Status of Power Bank |
|-------------------|--|------------------------------------|
| Off | Press | Turn on display |
| On | Press | Turn off display |
| Off/On | Press twice | Enable or disable low-current mode |
| | Press and hold for approximately 7 seconds | Reset system |

Specifications

Name: Power Bank

Model: PB2067

Rated Capacity: 12000 mAh 5 V/3 A

Battery Capacity: 6700 mAh 11.1 V 74.37 Wh

Input Port: USB-C/Integrated USB-C Cable

Output Port: USB-C/Integrated USB-C Cable/USB-A

Input: Integrated USB-C Cable IN1 5 V=3 A, 9 V=3 A, 12 V=3 A, 15 V=3 A, 20 V=3.25 A

USB-C IN2 5 V=3 A, 9 V=3 A, 12 V=3 A, 15 V=3 A, 20 V=3.25 A

Output: 67 W Max. Multi-port Output: 5 V=3 A

Integrated USB-C Cable OUT1 5 V=3 A, 9 V=3 A, 11 V=6.1 A, 12 V=3 A, 15 V=3 A, 20 V=3.35 A

USB-C OUT2 5 V=3 A, 9 V=3 A, 11 V=6.1 A, 12 V=3 A, 15 V=3 A, 20 V=3.35 A

USB-A OUT3 5 V=3 A, 9 V=2.23 A, 10 V=2.25 A, 12 V=1.67 A

Item Dimensions*: 140 × 72 × 31.2 mm

This power bank is equipped with three built-in cells, each with a rated capacity of 6700 mAh. These cells provide battery energy approximately equivalent to that provided by a single cell with a rated capacity of 20000 mAh.

*The dimensions do not include the integrated cable.

Port Protocol

| Status | Port | Supported Protocol |
|-------------|-------------------------------|--|
| Discharging | Integrated USB-C Cable (OUT1) | PD2.0, PD3.0(PPS), BC1.2 |
| | USB-C (OUT2) | QC2.0, QC3.0, QC3.5, PD2.0, PD3.0(PPS), BC1.2, Apple2.4A |
| | USB-A (OUT3) | QC2.0, QC3.0, QC3.5, BC1.2, Apple2.4A |
| Charging | Integrated USB-C Cable (IN1) | PD2.0, PD3.0 |
| | USB-C (IN2) | QC2.0, PD2.0, PD3.0 |

Precautions

- Please fully charge the power bank on its first use.
- Use a qualified charger and charging cable (Xiaomi brand is recommended, and chargers and cables supporting 65W charging ensure optimal performance) when charging the power bank or using it to charge other devices.
- Do not leave the power bank unattended when it is being charged. Remove it from the power supply before going out or leaving for a long time.
- Once this power bank is fully charged, or after it is used to fully charge other devices, unplug the charging cable or remove the charged device in a timely manner to prevent damage due to long-time connection.
- Once this power bank is fully charged or charges another device to full, unplug the charging cable in time to avoid power consumption of the power bank.
- If there is no battery level indication after the button is pressed, the power bank may be under protection, and you can try to charge the power bank to restore it.
- When the power bank will not be used for an extended period, store it in a cool and dry place, with a battery level of about 25%–50%. To extend its battery life, avoid storing it with its battery fully charged or depleted.
- Do not place any cards with a magnetic strip or chip (such as an ID or bank card) near or on the charging surface, so as to avoid corrupting the card.
- Keep implanted medical devices (pacemakers, cochlear implants, etc.) at least 20 cm away from the power bank, so as to avoid potential interference with the medical devices.
- The power bank supports smart temperature control. If a device is frequently plugged/unplugged into/from the power bank during fast charging, it may result in temperature detection errors. Therefore, it is recommended to continuously charge a device, rather than frequently plug/unplug it into/from the discharging port.
- This power bank is not waterproof. Avoid liquid from entering it to prevent damage. Do not use it after it has been soaked in water.

WARNINGS

Improper use may result in battery failure, overheating, or even fire or explosion. In order to avoid harm to your personal safety and property, please keep and use this product strictly in accordance with the following requirements:

- This power bank is not a toy. Please keep it away from children. Do not let children use or play with this power bank in order to avoid accidents.
- Make sure you use a charger that complies with the local safety standards when charging this product, in order to prevent an electric shock or damage to the battery.
- Do not expose this power bank to pressure, impact, strong vibrations, or liquids. Any of these occurrences may lead to a short circuit or cause damage to the battery or electrical circuit. If this happens, stop using the power bank immediately, and dispose of it properly.
- When the power bank becomes swollen, deformed, starts to leak, or its capacity is significantly reduced, please stop using it immediately and dispose of it properly.
- Do not charge or discharge this power bank in places where its heat dissipation may be affected, such as in the pocket of your pants, a closed bag, or on a bed or sofa. Ensure the power bank is not covered by clothing, pillows, bedding, or other miscellaneous items during its working. When using the power bank to charge devices including phones for an extended time, do not stack them together to ensure better heat dissipation.
- Do not disassemble, cut, squeeze, puncture, short-circuit the power bank or expose it to liquids, fire, heat sources such as stoves, heaters, or an environment with an ambient temperature higher than 60°C (140°F). In hot weather, do not leave this power bank in a car outdoors or other places under direct sunlight.
- This power bank contains the lithium-ion battery. Opening the casing is strictly prohibited so as to avoid battery damage or safety hazards.
- Do not replace the battery by yourself. Replacing the battery with the wrong type may result in a failure of safety protection, causing an explosion or fire.
- The battery pack subjected to extremely low air pressure during use, storage or transportation may result in explosions or leakage of flammable liquids or gases.
- Do not dispose of batteries as household waste. Dispose of them safely as per local laws and regulations.
- To ensure flight safety and avoid potential risks, strictly comply with relevant aviation safety regulations, and carry the power bank with you. Do not place it in the luggage compartment. It is strictly prohibited to use it throughout the whole flight after boarding.

EU Declaration of Conformity

CE The manufacturer hereby, declares that this equipment is in compliance with the applicable Directives and European Norms, and amendments. The full text of the EU declaration of conformity is available at the following internet address:
<https://www.mi.com/global/service/support/declaration.html>

WEEE Information



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

Note: Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.

Manufacturer: Xiaomi Communications Co., Ltd.

Address: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, 100085, China

For further information, please go to www.mi.com

User Manual Version: V1.0

EU REP.

Xiaomi Technology Netherlands B.V.

Prinses Beatrixlaan 582, 2595BM, The Hague, The Netherlands

contact@support.mi.com

Importer:

Beryko s.r.o.

Pod Vinicemi 931/2, 301 00 Plzeň

www.beryko.cz



beryko



M060A0300062



PAP